

ADVANCED HIGH CEILING

Tetriss 2.0 Series - Outdoor/Natatorium



High-performing modular luminaire with lumen output 16600-60300lm for replacement of up to 1500W Metal Halide.

- Outdoor/Natatorium Rating
Special coating, sealant, and wiring is applied for long term operation in harsh environments.

Standard version available, please refer to Standard spec sheet for more details.

Quantity		Type	
Project		Note	

Electrical System

- 20100 lm (200W)
- 40200 lm (400W)
- 60300 lm (600W)
- Power Input: Universal (120-277V); HVT (347-480V)
- Operating Temperature: -40°F~112°F
- Surge Protection: 10KV

LED Technology

- 3000K, 4000K , 5000K
- 75 CRI, 85 CRI
- Beam Angle: 15°, 25°, 40°, 60°
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V dims to 10%

Housing

- Material: Aluminum, Tempered Glass
- Weight: 200W / 18lbs, 400W / 37.48lbs, 600W / 57.3lbs

Mounting

- Bracket Mount
(AC/Dimming cable length: Standard / 6ft)

EPA

- TSW-200: 1.21 ft2 / TSW-400: 2.12 ft2 / 600: 2.69 ft2

Warranty

- 5 years limited warranty.

Listing

- ETL Wet Location Listed
- Natatorium Rating (optional)
- IP65 Outdoor Rating (optional)
- CE



Tetriss 2.0 Series - Outdoor/Natatorium



How To Specify:

Ordering Example: TSW-400-507-UNV-STV-25-BLK-BRK-OUT

<p>Model</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>TSW Tetriss Solid White</p>	<p>Wattage</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>200 200W 400 400W 600 600W</p>	<p>CCT / CRI</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>308 3000K / CRI85 408 4000K / CRI85 507 5000K / CRI75</p>	<p>Voltage</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>UNV 120-277V HVT 347-480V</p>	<p>Dimming</p> <div style="border: 1px solid black; padding: 5px; text-align: center;">STV</div> <p>STV Standard 0-10V <10%</p>
<p>Beam Angle</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>15 15° 25 25° 40 40° 60 60°</p>	<p>Finish</p> <div style="border: 1px solid black; padding: 5px; text-align: center;">BLK</div> <p>BLK Black</p>	<p>Mounting</p> <div style="border: 1px solid black; padding: 5px; text-align: center;">BRK</div> <p>BRK Bracket Mount</p>	<p>Accessories</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>GSB* Glare Shield Baffle GSV* Glare Shield Visor SLP Slipfitter</p> <p><small>*Please factor in change in lumen output of 25%.</small></p>	<p>Rating</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>OUT¹ Outdoor Rating NAT² Natatorium Rating</p> <p><small>¹ Outdoor rating: Coating and wiring will be changed to high UV resistant and corrosion resistant materials for long term operation in outdoor environments. ² Natatorium rating: Coating and sealant will be changed to high corrosion resistant materials to prevent damage from long term exposure to chlorine vapors.</small></p>

Tetriss 2.0 Series - Outdoor/Natatorium




Delivered Lumens*


Wattage CCT	200W	400W	600W
5000K	20100 lm	40200 lm	60300 lm
4000K	17700 lm	35400 lm	53010 lm
3000K	16600 lm	33200 lm	49600 lm

*Tolerance ± 8%


Dimensions

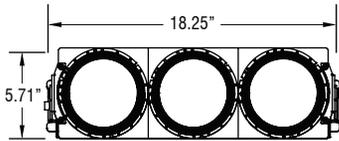

200W / 3 Modules

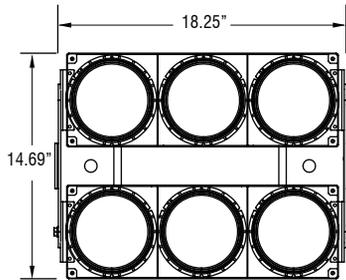

400W / 6 Modules

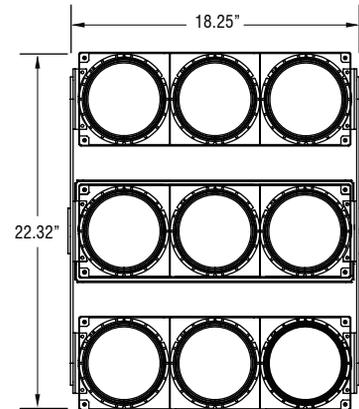


600W / 9 Modules


Mounting Options






Bracket Mount / 3 Modules

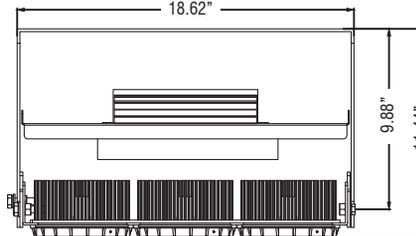

Bracket Mount / 6 Modules

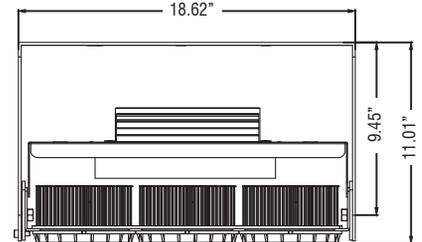

Bracket Mount / 9 Modules

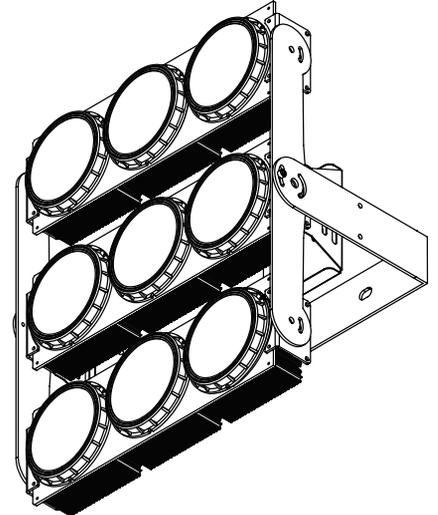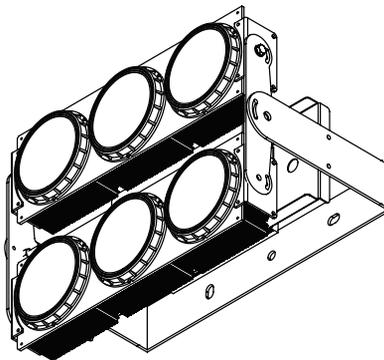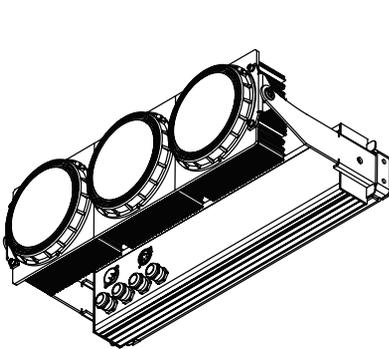

Accessory

Glare Shield Baffle

Glare Shield Visor

