


ADVANCED HIGH CEILING

Tetriss 2.0 Series - Standard

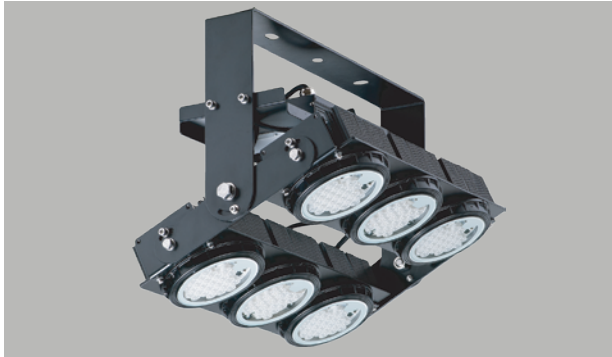

High-performing modular luminaire with lumen output 16600-60300lm for replacement of up to 1500W Metal Halide. Additional features include IP65, outdoor/natatorium rating.

- Outdoor/Natatorium Rating
(Please refer to Outdoor/Natatorium Version spec sheet)

Special coating, sealant, and wiring is applied for long term operation in harsh environments.

Quantity	Type
Project	Note

Electrical System

- 20100 lm (200W)
- 40200 lm (400W)
- 60300 lm (600W)
- Power Input: Universal (120-277V); HVT (347-480V)
- Operating Temperature: -40°F~112°F
- Surge Protection: 10KV
- Remote Emergency Pack: Bodine BSL20LV

LED Technology

- 3000K, 4000K , 5000K
- 75 CRI, 85 CRI
- Beam Angle: 15°, 25°, 40°, 60°
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V dims to 10%
- Superior 0-10V: dims to 1%
- DMX: high resolution dims to 0.1%
 (Supports ANSI E1.20 RDM protocol)

Housing

- Material: Aluminum, Tempered Glass
- Weight: 200W / 18lbs, 400W / 37.48lbs, 600W / 57.3lbs

Mounting

- Bracket Mount
 (AC/Dimming cable length: Standard / 6ft)

Warranty

- 5 years limited warranty.

Listing

- ETL Damp Location Listed
- CE



Tetriss 2.0 Series - Standard



How To Specify:

Ordering Example: TSW-400-507-UNV-DMX-25-BLK-BRK

Model	Wattage	CCT / CRI	Voltage	Dimming
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
TSW Tetriss Solid White	200 200W 400 400W 600 600W	308 3000K / CRI85 408 4000K / CRI85 507 5000K / CRI75	UNV 120-277V HVT 347-480V	STV Standard 0-10V <10% SPV Superior 0-10V <1% DMX DMX <0.1% (XLR Sockets)

Beam Angle	Finish	Mounting	Accessories
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
15 15° 25 25° 40 40° 60 60°	BLK Black	BRK Bracket Mount	GSB* Glare Shield Baffle GSV* Glare Shield Visor EMP Remote Emergency Pack SLP Slipfitter

*Please factor in change in lumen output of 25%.

Tetriss 2.0 Series - Standard




Delivered Lumens*


Wattage CCT	200W	400W	600W
5000K	20100 lm	40200 lm	60300 lm
4000K	17700 lm	35400 lm	53010 lm
3000K	16600 lm	33200 lm	49600 lm

*Tolerance ± 8%


Dimensions

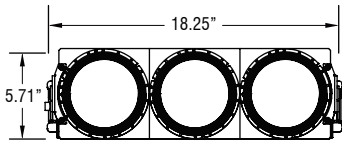

200W / 3 Modules

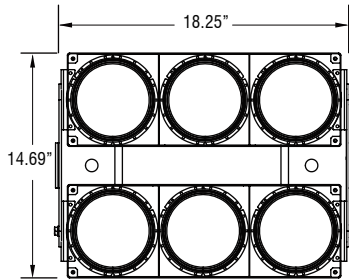

400W / 6 Modules

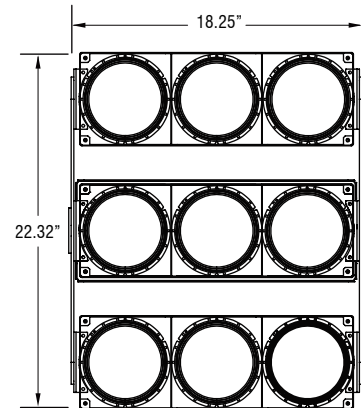


600W / 9 Modules


Tetriss 2.0 Series - Standard




Mounting Options

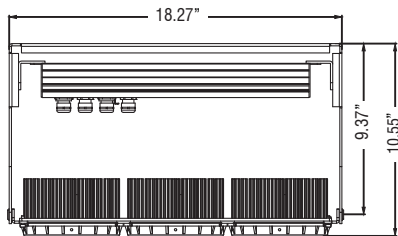




Bracket Mount / 3 Modules

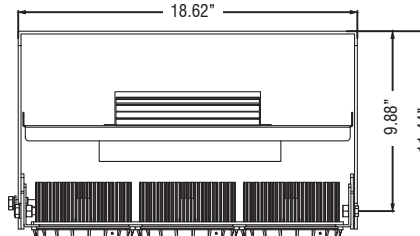

Bracket Mount / 6 Modules

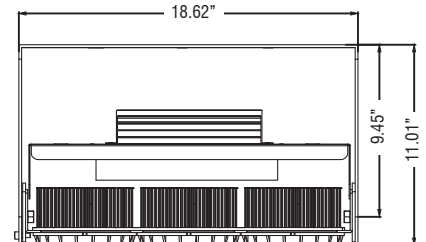

Bracket Mount / 9 Modules

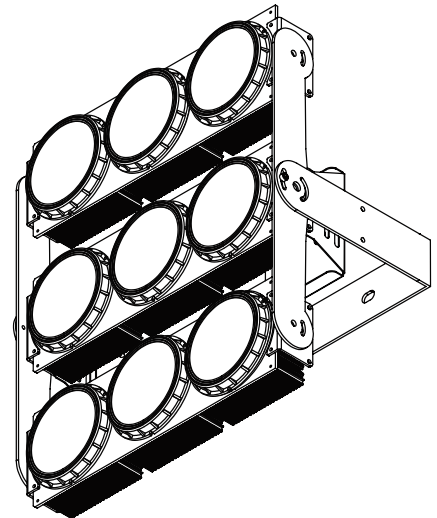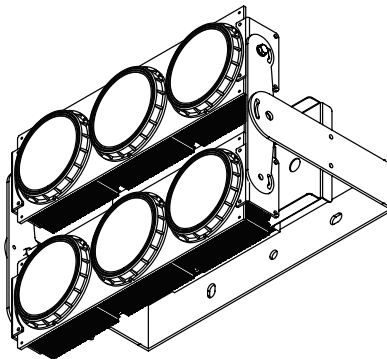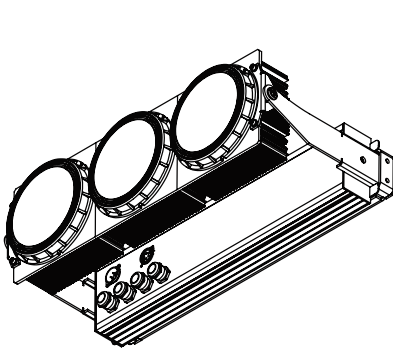

Accessory

Glare Shield Baffle

Glare Shield Visor

