



Specification

Page 1 of 1
20140618

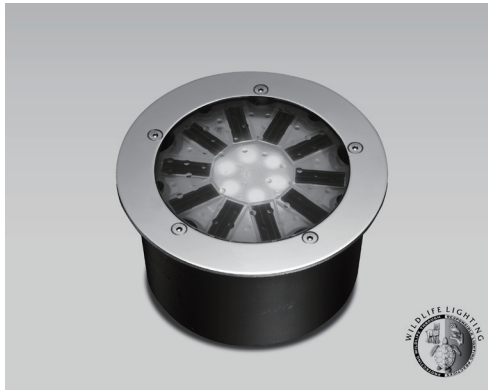

METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.



SH-270 Solar LED Ground Light

Water Proof / No Wiring

Type : _____
 Project : _____
 Quantity: _____
 Note : _____

General

Weight: 1.21 lbs
Rim Finish: Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass
Lens: GE super light permeable PC
Housing: SUS304 stainless steel, cast aluminum
Power Storage: Ultracapacitor

Operational

Operation Time: Minimum 12 hours (fully charged) 4-8 hours (overcast)
Full Charge Time: 6 hours (direct sunlight)
Switch: Light sensitive auto on/off

Environmental

Compressive Strength: 2818 lbs/1281 kgs (maximum)
Operating Temperature: -4° F -140° F
Storage Temperature: -40° F -176° F

Warranty

3 year limited warranty. See www.meteor-lighting.com for details.



Ordering Logic:

Ex.SH270C-W-B-H

Model	LED Color*	Rim Finish	Housing
SH270C (Product) SH270B (Battery sample)	A (Amber) B (Blue) G (Green) R (Red) W (White) WW (Warm white)	B (Brushed Stainless Steel) P (Polished Stainless Steel) B316 (SUS316 Stainless Steel) BR (Brass)	H (Housing and Anchor Plate Included) - (Without Housing and Anchor Plate)

*Color	LUX (Average)
White	90
Amber	40
Red	100
Blue	95
Green	60
Warm White	160



METEOR Solar LED reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
 1300 John Reed Court, Unit B, City of Industry, California 91745 P: 213.255.2060 F: 213.596.3704 www.meteor-lighting.com