



# Specification

Page 1 of 1  
20140618

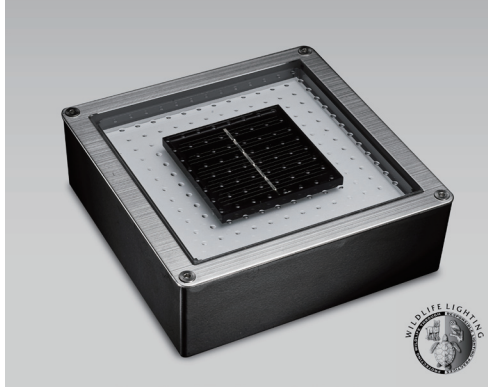

METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.

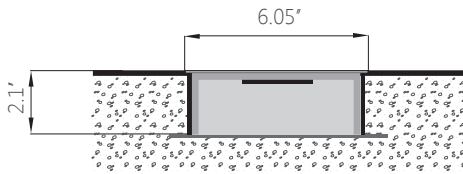

# SH-170 Solar LED Paver Light

Water Proof / No Wiring

Type : \_\_\_\_\_  
 Project : \_\_\_\_\_  
 Quantity: \_\_\_\_\_  
 Note : \_\_\_\_\_

### General

**Weight:** 2.42 lbs  
**Rim Finish:** Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass  
**Lens:** GE super light permeable PC  
**Housing:** SUS304 stainless steel, cast aluminum  
**Power Storage:** Ultracapacitor

### Operational

**Operation Time:** Minimum 12 hours (fully charged) 4-8 hours (overcast)  
**Full Charge Time:** 6 hours (direct sunlight)  
**Switch:** Light sensitive auto on/off

### Environmental

**Compressive Strength:** 9902 lbs/4456 kgs (maximum)  
**Operating Temperature:** -4° F -140° F  
**Storage Temperature:** -13° F -176° F

### Warranty

3 year limited warranty. See [www.meteor-lighting.com](http://www.meteor-lighting.com) for details.



### Ordering Logic:

Ex.SH170C-W-B-H

| Model                                       | LED Color*  | Rim Finish   | Housing   |
|---|---|--|---|
| SH170C (Product)<br>SH170B (Battery sample) | A (Amber)<br>B (Blue)<br>G (Green)<br>R (Red)<br>W (White)<br>WW (Warm white) | B (Brushed Stainless Steel)<br>P (Polished Stainless Steel)<br>B316 (SUS316 Stainless Steel)<br>BR (Brass) | H (Housing and Anchor Plate Included)<br>- (Without Housing and Anchor Plate) |

| *Color     | LUX (Average) |
|------------|---------------|
| White      | 35            |
| Amber      | 25            |
| Red        | 65            |
| Blue       | 25            |
| Green      | 50            |
| Warm White | 30            |

