


# Specification

Page 1 of 1  
20140618



METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.

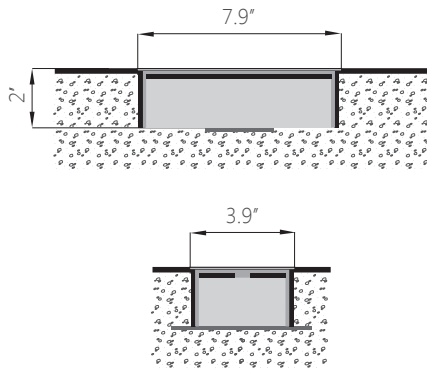

# SH-180 Solar LED Paver Light

Water Proof / No Wiring

Type : \_\_\_\_\_  
 Project : \_\_\_\_\_  
 Quantity: \_\_\_\_\_  
 Note : \_\_\_\_\_

### General

**Weight:** 2.54 lbs  
**Rim Finish:** Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass  
**Lens:** GE super light permeable PC  
**Housing:** SUS304 stainless steel, cast aluminum  
**Power Storage:** Ultracapacitor

### Operational

**Operation Time:** Minimum 12 hours (fully charged) 4-8 hours (overcast)  
**Full Charge Time:** 6 hours (direct sunlight)  
**Switch:** Light sensitive auto on/off

### Environmental

**Compressive Strength:** 9902 lbs/4456 kgs (maximum)  
**Operating Temperature:** -4° F -140° F  
**Storage Temperature:** -13° F -176° F

### Warranty

3 year limited warranty. See [www.meteor-lighting.com](http://www.meteor-lighting.com) for details.



### Ordering Logic:

Ex.SH180C-W-B-H

Model	LED Color*	Rim Finish	Housing
<b>SH180C</b> (Product) <b>SH180B</b> (Battery sample)	<b>A</b> (Amber) <b>B</b> (Blue) <b>G</b> (Green) <b>R</b> (Red) <b>W</b> (White) <b>WW</b> (Warm white)	<b>B</b> (Brushed Stainless Steel) <b>P</b> (Polished Stainless Steel) <b>B316</b> (SUS316 Stainless Steel) <b>BR</b> (Brass)	<b>H</b> (Housing and Anchor Plate Included) - (Without Housing and Anchor Plate)

*Color	LUX (Average)
White	55
Amber	40
Red	80
Blue	35
Green	90
Warm White	47.5



METEOR Solar LED reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.  
 1300 John Reed Court, Unit B, City of Industry, California 91745 P: 213.255.2060 F: 213.596.3704 [www.meteor-lighting.com](http://www.meteor-lighting.com)